
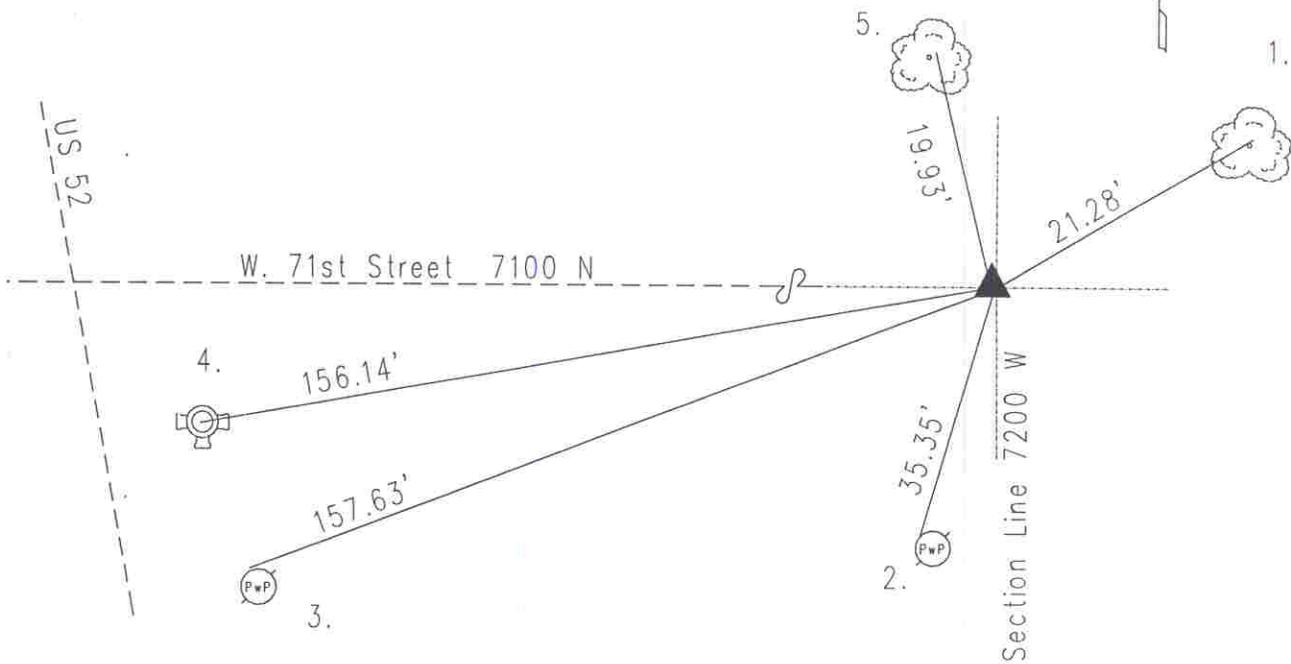


OFFICE OF THE MARION COUNTY SURVEYOR
 SECTION RECORD CORNER
 SECTION 34 TOWNSHIP 17 RANGE 2
 DATE: 3-27-2000
 PARTY CHIEF: Wilcoxon
 CREW: _____
 TYPE OF MARKER: Harrison
 METHOD OF ESTABLISHMENT: County: 10-25-90

IN. S.P.C. E ZONE, NAD 83
 NAME: 17023402
 N: 514511.6142(m)
 E: 46829.7115(m)

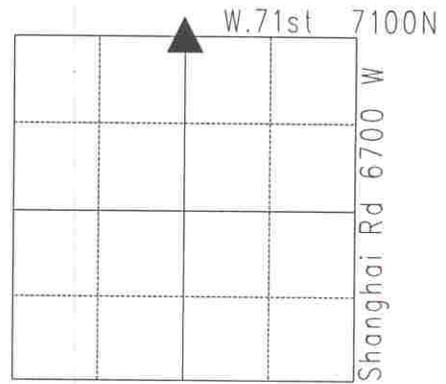

Original post set 1821 by Wm. B. Laughlin with witnesses: 14" sugar S 23 E 27 links; 10" dogwood N 9 W 17 links per Marion County Atlas pg.4. Survey by Percy Hosbrook 4-29-1852 indicates a rock set with following witness: 32" poplar N 13 1/2 degrees E 32 links, 16" elm N 47 E 46 links. Burres 10-4-48 called road nail with washer Schmidt 9-27-61 called the same. Schmidt 10-3-62 called the same. Miller 5-20-75 called a PK nail with washer over brass plug 4" dn. ISHC 9-26-84 called brass plug. 10-25-90 Wilcoxon excavated corner and 1 1/2" by 1 1/2" by 4" square brass plug down 7" found. An old wooden stake was found under the plug. Harrison set. Re-tied 3-27-2000 by Wilcoxon.

HC723402

REF.	DISTANCE	DESCRIPTION
1.	21.28'	Mag nail w/brass washer NW 10" ash leaning SE 24" up
2.	35.35'	Mag nail w/brass washer W PwP#36-252B 12" up
3.	157.63'	Mag nail w/brass washer N PwP#35-252B 48" up
4.	156.14'	Top nut of fire hydrant
5.	19.93'	Mag nail w/brass washer E mulberry tree leaning W